

# REVERSIBLE WINDOW & WALL TYPE DOMESTIC FAN

Rev.01  
27-05-2015



## GMC DMF-562:

Reversible window/wall fan

### Application

- Window/Wall fans use in pubs, restaurants, offices, kitchens, factories, schools and shops

### Composition

- High gloss white housing.
- Reversible two speed axial fan for air intake or extraction
- Supply: 230Vac 1ph
- Protection: IPX4, insulation class B for DMF-562 and F for DMF-563
- Built-in silent action electro-thermal shutter cassette
- Shadow grey external grille for unobtrusive external appearance
- BEAB approved

### Models

- DMF-562 Operated by remote On/Off switch or **FR22/30** or **EC6H** controller
- DMF-562:Mk.C** Integral pullcord switch fan On and opens shutter
- DMF-563** Operated by remote On/Off switch or **FR22/30** or **EC6H** controller

### Accessories

- FR22/30** ON/OFF control with indicator for high and low speed, intake and extraction
- EC6H** ON/OFF control with indicator for variable speed selection, intake and extraction

### Order example

DMF-562 = standard type + FR22/30 + EC6H  
Mk.C = with pull cord  
FR22/30= 2 speed controller  
EC6H= speed controller



HVAC Systems and Equipments Co.  
4640 Hedcoxe Road 227 Plano, TX 75024 – US

[www.gmcair.com](http://www.gmcair.com)




# REVERSIBLE WINDOW & WALL TYPE DOMESTIC FAN

Rev.01  
27-05-2015



## Technical data

	Qv [m³/h]		P [W]	n [rpm]	Lpa @ 3m [dB(A)]	
	Qv,e V1/V2	Qv,s V1/V2			Lpa,e V1/V2	Lpa,s V1/V2
DMF-562	720 / 615	465 / 420	45	1250	49 / 43	50 / 48
DMF-562: Mk.C	580	-	30	1069	44	-
DMF-563	1620 / 1200	1060 / 835	90	1100	51 / 45	54 / 49

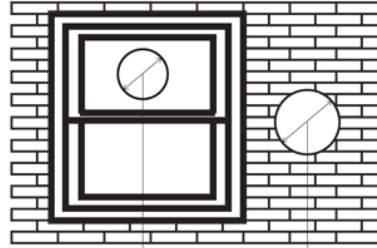

DMF-562 / 562-Mk.C: Ø257mm  
DMF-563: Ø324mm

DMF-562 / 562-Mk.C: Ø266mm  
DMF-563: Ø330mm