

FIRE LOUVERS

Rev.02
27-05-2015



GMC FL-065 PRODUCT SPECIFICATIONS:

- Standard Material: Special PVC Material.
- In fire resistant walls or doors, vertical installation only.
- Prevents spread of fire to neighbouring indoor areas; In any case of fire, PVC lamellas will melt and solidificate upon themselves, then cut air flow out from both sides.
- Usable for environment temperature of 50⁰C maximum.
- Fire resistant up to 1 hour.
- Has two models: Rectangular Model (FL-165) and Circular Model (FL-265).
- No need for maintenance, easy to mount.
- Has %60-65 Free section.




FIRE LOUVERS

Rev.02
27-05-2015



TECHNICAL DETAILS

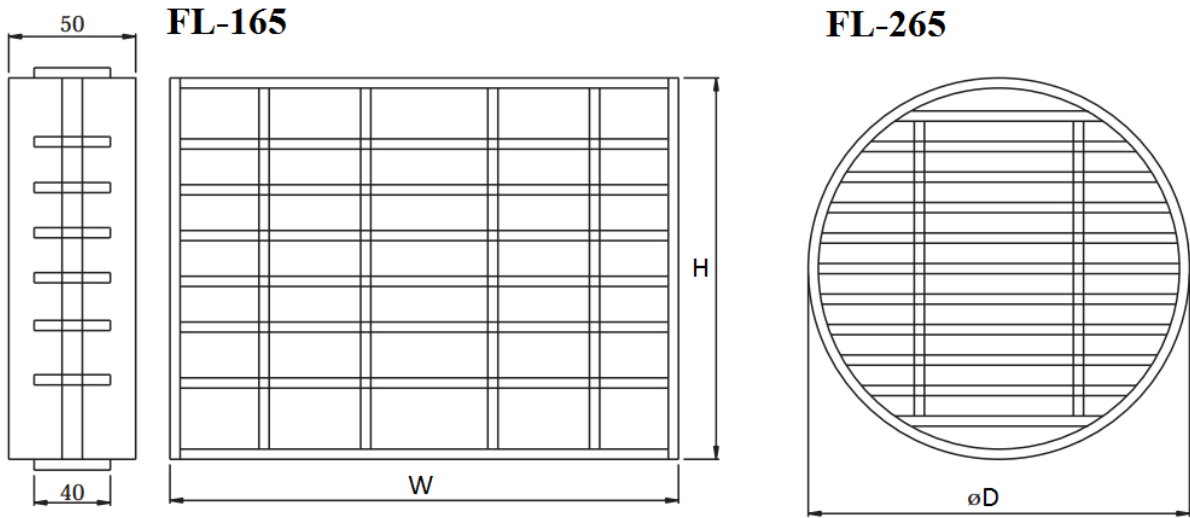

FL-165 STANDARD SELECTION TABLE


H / W	200	250	300	350	400	450	500	550	600
100	Products available with any combinations of H / W dimensions which indicated top row (W) and left column (H)								
150									
200									
250									
300									
350									
400*									

FL-265 DIAMETERS

øD	70 - 80 - 100 - 125 - 150 - 160 - 180 - 200 - 250* - 315* - 355* - 400* - 450*
----	--

* No test report available

WORKING PRINCIPLE

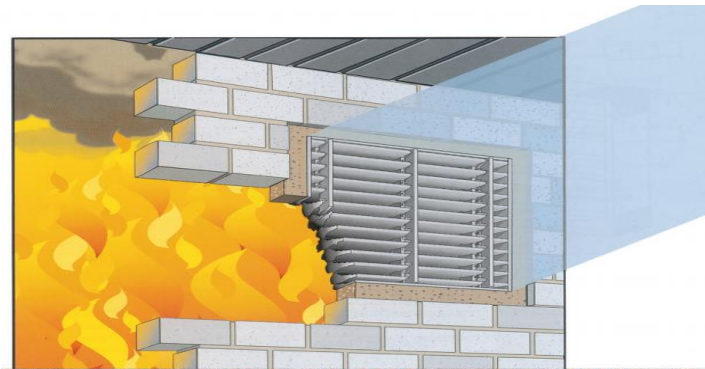

HVAC Systems and Equipments Co.
4640 Hedgcoxe Road 227 Plano, TX 75024 – US

www.gmcair.com



FIRE LOUVERS

ORDER PARAMETERS

FL-065	F220	-	00	N 300X300
<p>FL-165: Rectangular FL-265: Circular</p> <p>F220: Frame=22 mm F325: Frame=32,5 mm</p>		- Standard Application		<p>N: Neck Size D: Neck Diameter</p> <p>00: No Mounting FM: Clip-Fitted Mounting</p>

