


Aluminum Punkah Louver - Panel Series

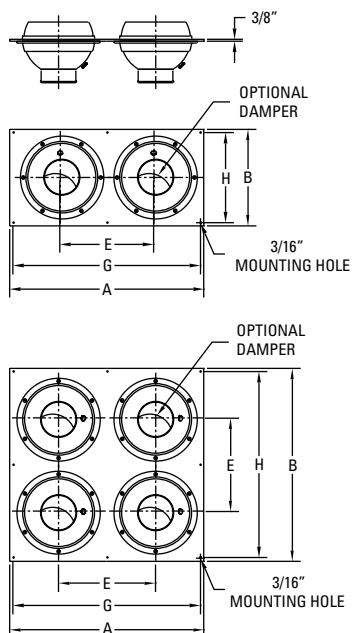

HIGH VELOCITY TASK AIR OUTLET

- Low Noise Levels
- Low Pressure Requirements

ADJUSTABILITY

- Easy Finger Tip Adjustment
- Directional Air Pattern Control:
70 Degree Global Rotation Minimum
±35 Degree Deflection
360 Degree Rotation

MODEL	APL MODEL	APL Per Panel	A	B	Duct Size	E	G	H
APL-04/04A-P2R	APL-04/04A	2	14	8	12 x 6	7	11	7
APL-06/06A-P2R	APL-06/06A	2	18	10	16 x 8	9	15	9
APL-08/08A-P2R	APL-08/08A	2	24	12	22 x 10	11-1/2	21	11
APL-10/10A-P2R	APL-10/10A	2	28	14	26 x 12	13-1/2	25	13
APL-12/12A-P2R	APL-12/12A	2	32	16	30 x 14	15-1/2	29	15
APL-04/04A-P4S	APL-04/04A	4	14	14	12 x 12	7	11	13
APL-06/06A-P4S	APL-06/06A	4	18	18	16 x 16	9	15	17
APL-08/08A-P4S	APL-08/08A	4	24	24	22 x 22	11-1/2	21	23
APL-10/10A-P4S	APL-10/10A	4	28	28	26 x 26	13-1/2	25	27
APL-12/12A-P4S	APL-12/12A	4	32	32	30 x 30	15-1/2	29	31

Inches measured to the nearest 1/16 inch

STANDARD FINISH:

- #10 Clear Anodized
- #42 Gloss Black Powder Coat
- #52 White Powder Coat
- #72 Silver Metallic Powder Coat
- #00 Mill Aluminum

OPTIONS:

- Aperture Damper
- Custom Finish _____

MATERIAL:

- Aluminum
- Stainless Steel Damper Hardware
- Foam Gasket

NOTES:

- Mounting Screws Included
- "A" in Model Name Designates Aperture Damper Required

Project:	<h2>APL-Panel Series</h2> <p>Aluminum Punkah Louver - Panel Mount</p>
Architect:	
Engineer:	
Contractor:	Form No: 20011S
Submitted By:	Drawn By: MH January 2005
Date:	