

Dehumidifier consorb **DC-20**




Dehumidifying capacity at 68°F / 60%RH

1.8 lbs/hr

Dry air flow


240 CFM

- ✎ Highly efficient D-MAX rotor
- ✎ Protected control panel
- ✎ Stainless steel chassis
- ✎ Self-regulating heater
- ✎ Fold-flat handle
- ✎ Long lifetime
- ✎ Easy access to filter

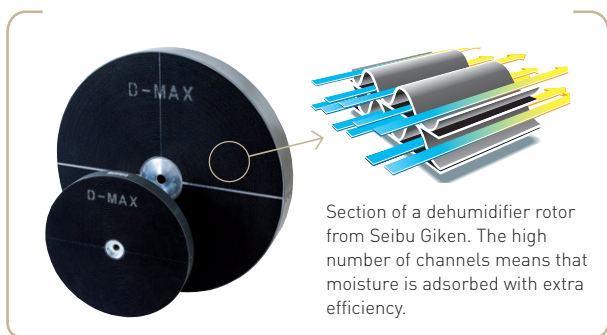


TECHNICAL DATA

Dehumidifier model	DC-20
Nominal capacity ¹ (lbs/h)	1.8
Dry air flow ² (CFM)	240
External static pressure wet air [in w.g]	0.4
Wet air flow ² (CFM)	24
External static pressure wet air [in w.g]	0.3
Heater current (A)	11
Total power (kW)	1.75
Supply fuse 115V / 60Hz [A]	15
Weight [lbs]	68

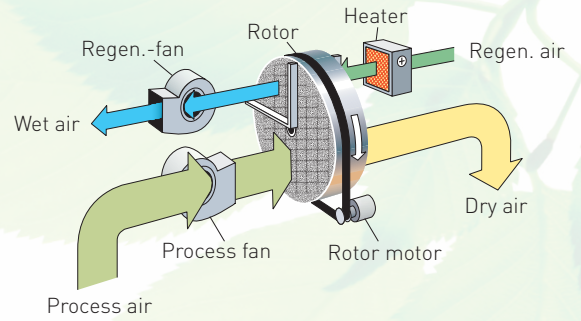


¹ Valid for 68°F/60%RH. For other condition see below table.
² Volume flow for density 0.075 lbs/ft³.
³ The design of the PTC heater enables the power to be regulated by controlling the wet air flow.

DEHUMIDIFICATION CAPACITY

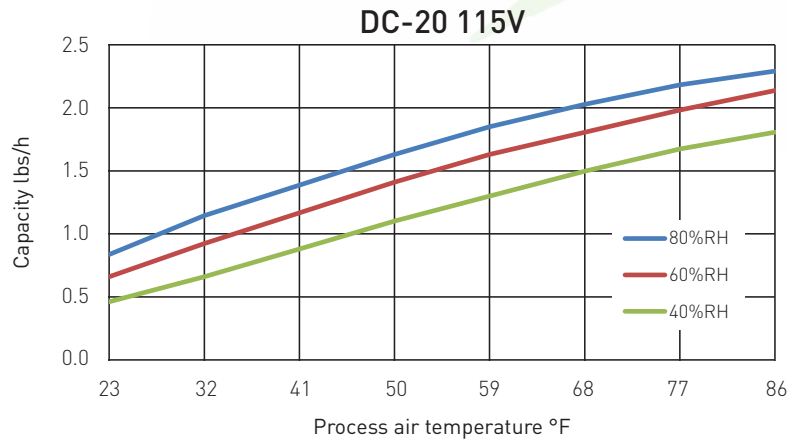

DIMENSIONS

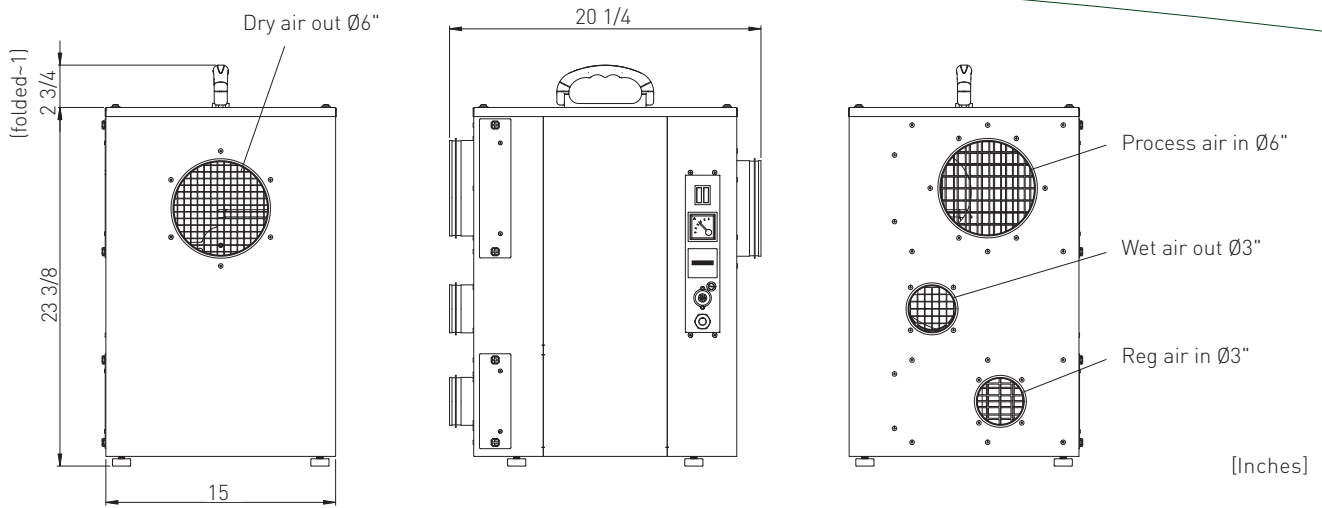

Subject to change without notice. Download installation drawing at www.dst-america.com.

