

## Dehumidifier Recusorb **DR-20B**




*Dehumidifying capacity at 68°F / 60%RH*

**1.8 lbs/hr**

*Dry air flow*


**190 CFM**

- ↘ Highly efficient D-MAX rotor
- ↘ Protected control panel
- ↘ Stainless steel chassis
- ↘ Self-regulating heater
- ↘ Fold-flat handle
- ↘ Long lifetime
- ↘ Easy access to filter

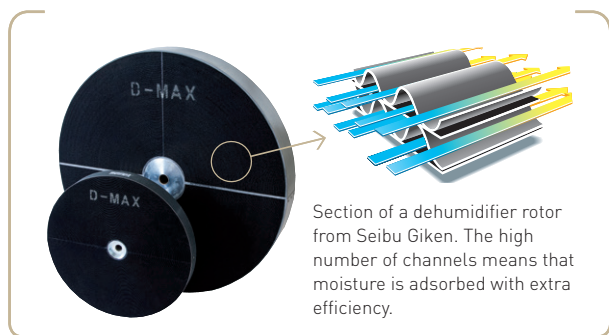


TECHNICAL DATA

Dehumidifier model	DR - 20B
Nominal capacity <sup>1</sup> (lbs/hr)	1.8
Dry air flow <sup>2</sup> (CFM)	190
Wet air flow <sup>2</sup> (CFM)	35
Heater current <sup>3</sup> (A)	8
Maximum electric consumption (kW)	1.3
Supply fuse 110-115V 60 Hz (A)	15
Weight (lbs)	33

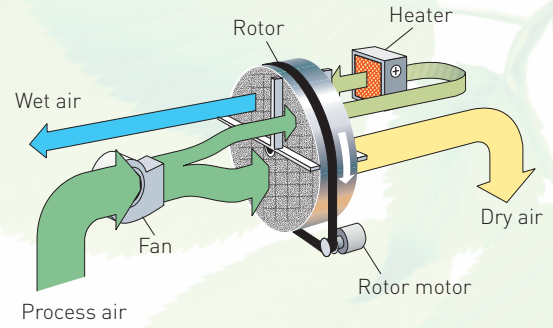


- <sup>1</sup> Valid for 68°F/60%RH. For other condition see below table.
- <sup>2</sup> Free blowing at density 0.075 lb/ft<sup>3</sup>.
- <sup>3</sup> The design of the PTC heater enables the power to be regulated by controlling the wet air flow.

DEHUMIDIFICATION CAPACITY

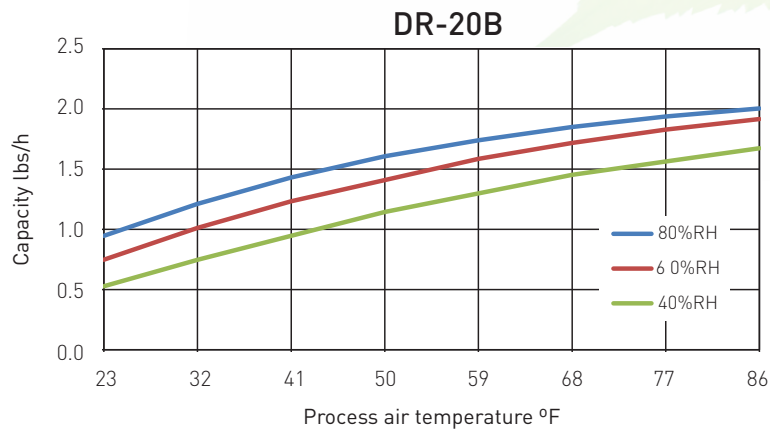

DIMENSIONS

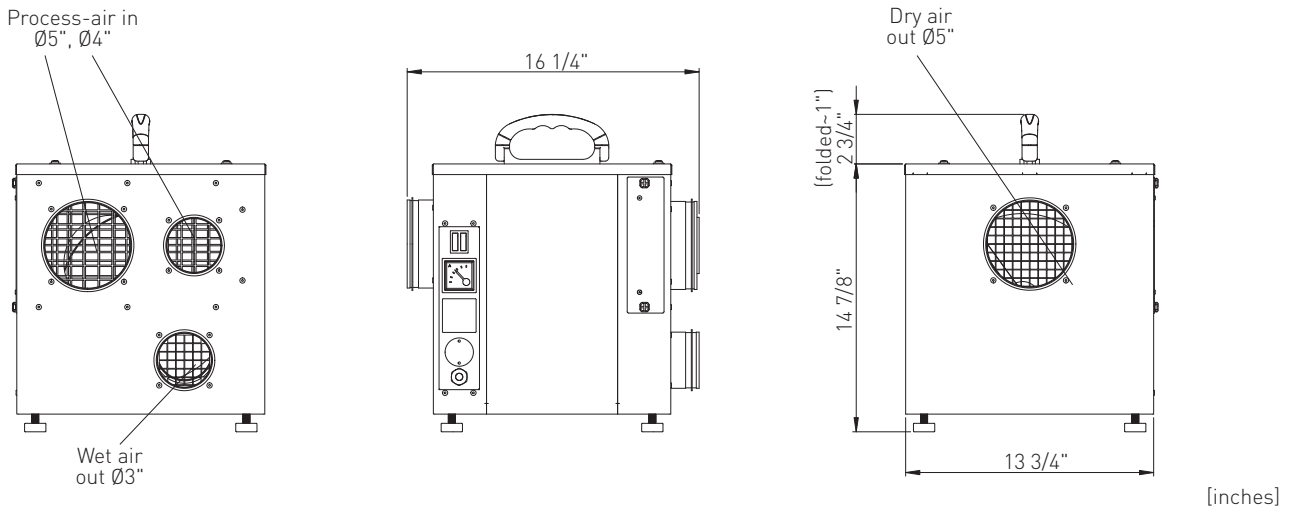

Subject to change without notice. Download installation drawing at [www.dst-america.com](http://www.dst-america.com).